


RSC

Part II: Network Layer 2. Introduction to IP



Redes y Servicios de Comunicaciones Universidad Carlos III de Madrid

These slides are, mainly, part of the companion slides to the book "Computer Networking: A Top Down Approach" generously made available by their authors (see copyright below). The slides have been adapted, where required, to the teaching needs of the subject above.

All material copyright 1996-2009
J.F Kurose and K.W. Ross, All Rights Reserved

*Computer Networking:
A Top Down Approach
5th edition.*


*Jim Kurose, Keith Ross
Addison-Wesley, April
2009.*

RSC Part II: Network Layer

- II. 1 Basic Network layer concepts
- II.2 Introduction to IPv4
 - Datagram format
 - ICMP
- II.3 IPv4 addressing
- II.4 IPv4 in operation
 - ARP
- II.5 IPv6
- II.6 Network routing
 - Link state
 - Distance Vector
- II.7 Routing in the Internet
 - Hierarchical routing
 - RIP


The Internet Network layer

Host, router network layer functions:

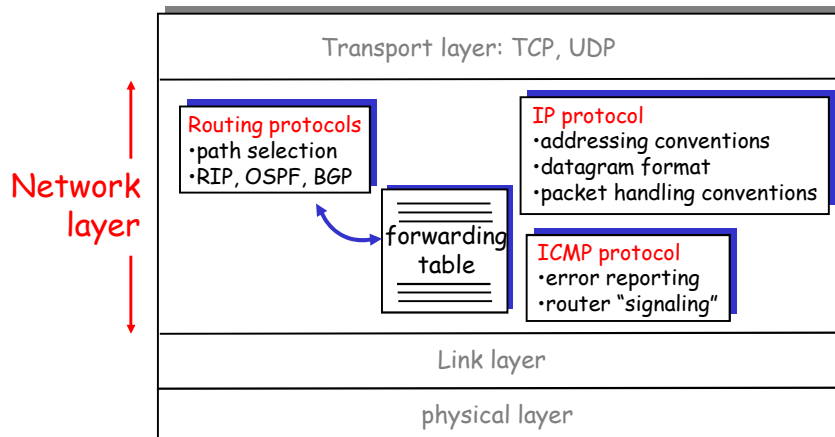

Network Layer 4-3


IP datagram format

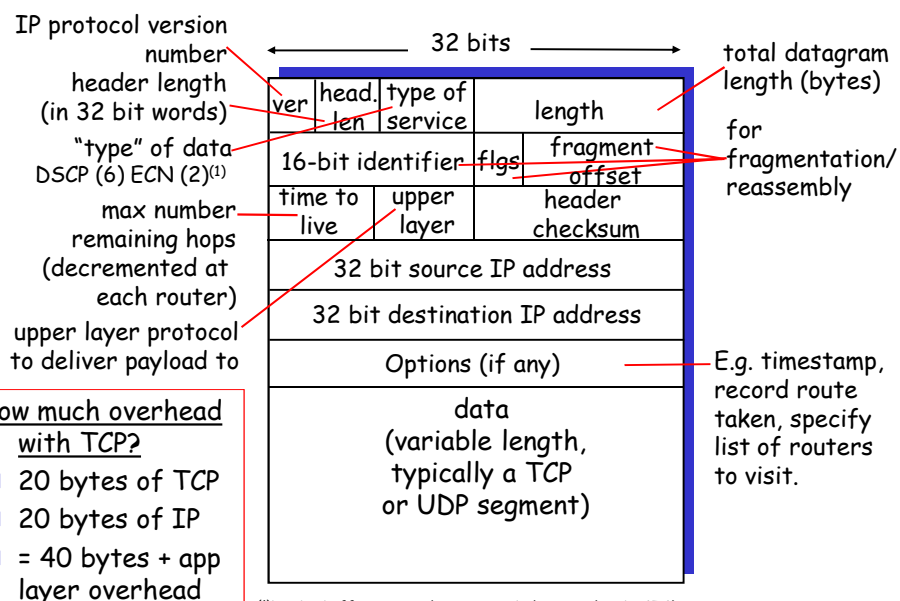

⁽¹⁾DSCP- Differentiated Services Code Point (RFC 2474) ECN - Explicit Congestion Notification (RFC 3168) Network Layer 4-4

IP Fragmentation & Reassembly

- network links have MTU (max.transfer size) - largest possible link-level frame.
 - different link types, different MTUs
- large IP datagram divided ("fragmented") within net
 - one datagram becomes several datagrams
 - "reassembled" only at final destination
 - IP header bits used to identify, order related fragments

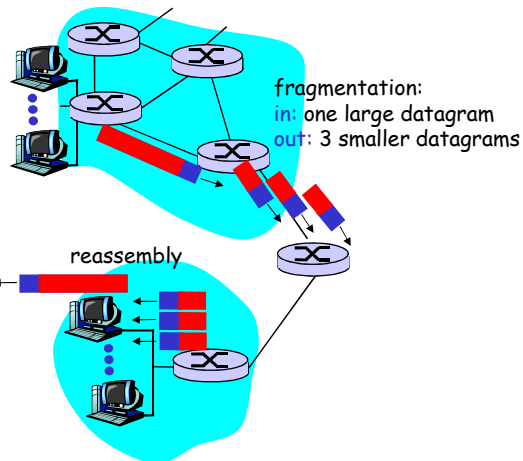

Network Layer 4-5

IP Fragmentation and Reassembly

Example

- 4000 byte datagram
- MTU = 1500 bytes

1480 bytes in data field

offset =
 $1480/8$

length	ID	fragflag	offset
=4000	=x	=0	=0

One large datagram becomes several smaller datagrams

length	ID	fragflag	offset
=1500	=x	=1	=0

length	ID	fragflag	offset
=1500	=x	=1	=185

length	ID	fragflag	offset
=1040	=x	=0	=370

Network Layer 4-6

ICMP: Internet Control Message Protocol

- ❑ used by hosts & routers to communicate network-level information
 - error reporting: unreachable host, network, port, protocol
 - echo request/reply (used by ping)
- ❑ network-layer "above" IP:
 - ICMP msgs carried in IP datagrams
- ❑ **ICMP message:** type, code plus first 8 bytes of IP datagram causing error

Type	Code	description
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

Network Layer 4-7

Traceroute and ICMP

- ❑ Source sends series of UDP segments to dest
 - First has TTL =1
 - Second has TTL=2, etc.
 - Unlikely port number
- ❑ When nth datagram arrives to nth router:
 - Router discards datagram
 - And sends to source an ICMP message (type 11, code 0)
 - Message includes name of router & IP address
- ❑ When ICMP message arrives, source calculates RTT
- ❑ Traceroute does this 3 times
- Stopping criterion**
- ❑ UDP segment eventually arrives at destination host
- ❑ Destination returns ICMP "port unreachable" packet (type 3, code 3)
- ❑ When source gets this ICMP, stops.

Network Layer 4-8