

Chapter 15 Kinematics of Rigid Bodies

- 15.1 Introduction
- 15.2 Translation
- 15.3 Rotation about a Fixed Axis
- 15.4 Equations Defining the Rotation of a Rigid Body about a Fixed Axis
- 15.5 General Plane Motion
- 15.6 Absolute and Relative Velocity in Plane Motion
- 15.7 Instantaneous Center of Rotation in Plane Motion
- 15.8 Absolute and Relative Acceleration in Plane Motion
- 15.9 Analysis of Plane Motion in Terms of a Parameter
- 15.10 Rate of Change of a Vector with Respect to a Rotating Frame
- 15.11 Plane Motion of a Particle Relative to a Rotating Frame. Coriolis Acceleration
- 15.12 Motion about a Fixed Point
- 15.13 General Motion
- 15.14 Three-Dimensional Motion of a Particle Relative to a Rotating Frame. Coriolis Acceleration
- 15.15 Frame of Reference in General Motion

15.1 INTRODUCTION

In this chapter, the kinematics of *rigid bodies* will be considered. You will investigate the relations existing between the time, the positions, the velocities, and the accelerations of the various particles forming a rigid body. As you will see, the various types of rigid-body motion can be conveniently grouped as follows:

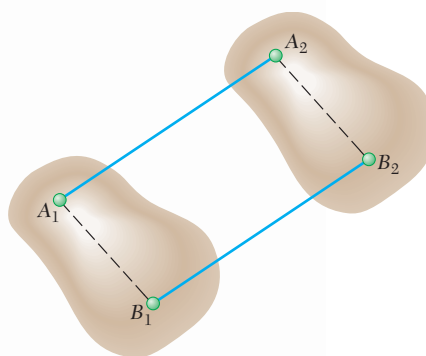


Fig. 15.1

1. **Translation.** A motion is said to be a translation if any straight line inside the body keeps the same direction during the motion. It can also be observed that in a translation all the particles forming the body move along parallel paths. If these paths are straight lines, the motion is said to be a *rectilinear translation* (Fig. 15.1); if the paths are curved lines, the motion is a *curvilinear translation* (Fig. 15.2).
2. **Rotation about a Fixed Axis.** In this motion, the particles forming the rigid body move in parallel planes along circles centered on the same fixed axis (Fig. 15.3). If this axis, called the *axis of rotation*, intersects the rigid body, the particles located on the axis have zero velocity and zero acceleration.

Rotation should not be confused with certain types of curvilinear translation. For example, the plate shown in Fig. 15.4a is in curvilinear translation, with all its particles moving along *parallel* circles, while the plate shown in Fig. 15.4b is in rotation, with all its particles moving along *concentric* circles.


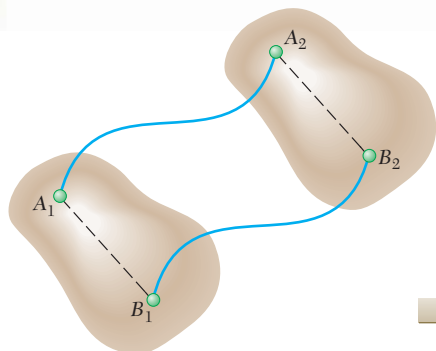


Fig. 15.2

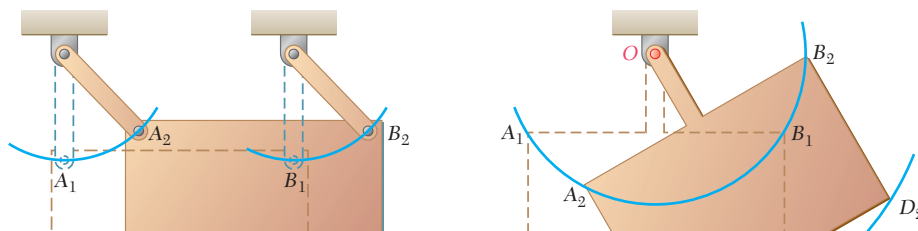

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70

Cartagena99

In the first case, any given straight line drawn on the plate will maintain the same direction, whereas in the second case, point O remains fixed.

Because each particle moves in a given plane, the rotation of a body about a fixed axis is said to be a *plane motion*.

3. **General Plane Motion.** There are many other types of plane motion, i.e., motions in which all the particles of the body move in parallel planes. Any plane motion which is neither a rotation nor a translation is referred to as a general plane motion. Two examples of general plane motion are given in Fig. 15.5.

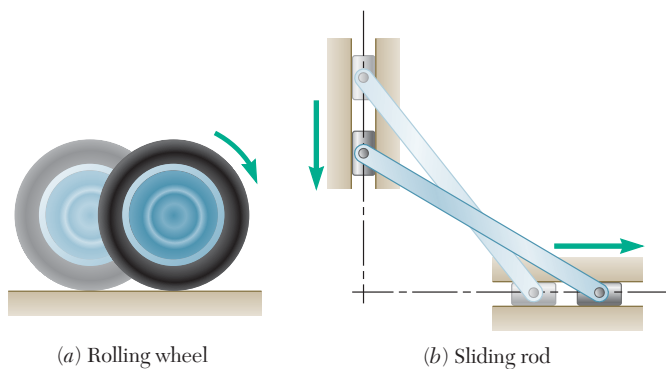


Fig. 15.5

4. **Motion about a Fixed Point.** The three-dimensional motion of a rigid body attached at a fixed point O , e.g., the motion of a top on a rough floor (Fig. 15.6), is known as motion about a fixed point.
5. **General Motion.** Any motion of a rigid body which does not fall in any of the categories above is referred to as a general motion.

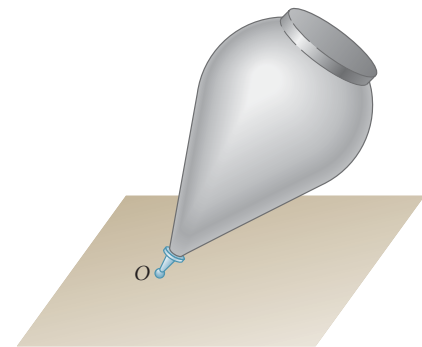


Fig. 15.6

After a brief discussion in Sec. 15.2 of the motion of translation, the rotation of a rigid body about a fixed axis is considered in Sec. 15.3. The *angular velocity* and the *angular acceleration* of a rigid body about a fixed axis will be defined, and you will learn to express the velocity and the acceleration of a given point of the body in terms of its position vector and the angular velocity and angular acceleration of the body.

The following sections are devoted to the study of the general plane motion of a rigid body and to its application to the analysis of mechanisms such as gears, connecting rods, and pin-connected linkages. Resolving the plane motion of a slab into a translation and a rotation (Secs. 15.5 and 15.6), we will then express the velocity of a

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70

Cartagena99

An alternative method for the analysis of velocities in plane motion, based on the concept of *instantaneous center of rotation*, is given in Sec. 15.7; and still another method of analysis, based on the use of parametric expressions for the coordinates of a given point, is presented in Sec. 15.9.

The motion of a particle relative to a rotating frame of reference and the concept of *Coriolis acceleration* are discussed in Secs. 15.10 and 15.11, and the results obtained are applied to the analysis of the plane motion of mechanisms containing parts which slide on each other.

The remaining part of the chapter is devoted to the analysis of the three-dimensional motion of a rigid body, namely, the motion of a rigid body with a fixed point and the general motion of a rigid body. In Secs. 15.12 and 15.13, a fixed frame of reference or a frame of reference in translation will be used to carry out this analysis; in Secs. 15.14 and 15.15, the motion of the body relative to a rotating frame or to a frame in general motion will be considered, and the concept of Coriolis acceleration will again be used.






Photo 15.1 This replica of a battering ram at *Château des Baux, France* undergoes curvilinear translation.

15.2 TRANSLATION

Consider a rigid body in translation (either rectilinear or curvilinear translation), and let A and B be any two of its particles (Fig. 15.7a). Denoting, respectively, by \mathbf{r}_A and \mathbf{r}_B the position vectors of A and B with respect to a fixed frame of reference and by $\mathbf{r}_{B/A}$ the vector joining A and B , we write

$$\mathbf{r}_B = \mathbf{r}_A + \mathbf{r}_{B/A} \quad (15.1)$$

Let us differentiate this relation with respect to t . We note that from the very definition of a translation, the vector $\mathbf{r}_{B/A}$ must maintain a constant direction; its magnitude must also be constant, since A and B



CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70

Cartagena99

belong to the same rigid body. Thus, the derivative of $\mathbf{r}_{B/A}$ is zero and we have

$$\mathbf{v}_B = \mathbf{v}_A \tag{15.2}$$

Differentiating once more, we write

$$\mathbf{a}_B = \mathbf{a}_A \tag{15.3}$$

Thus, when a rigid body is in translation, all the points of the body have the same velocity and the same acceleration at any given instant (Fig. 15.7b and c). In the case of curvilinear translation, the velocity and acceleration change in direction as well as in magnitude at every instant. In the case of rectilinear translation, all particles of the body move along parallel straight lines, and their velocity and acceleration keep the same direction during the entire motion.

15.3 ROTATION ABOUT A FIXED AXIS

Consider a rigid body which rotates about a fixed axis AA' . Let P be a point of the body and \mathbf{r} its position vector with respect to a fixed frame of reference. For convenience, let us assume that the frame is centered at point O on AA' and that the z axis coincides with AA' (Fig. 15.8). Let B be the projection of P on AA' ; since P must remain at a constant distance from B , it will describe a circle of center B and of radius $r \sin \phi$, where ϕ denotes the angle formed by \mathbf{r} and AA' .

The position of P and of the entire body is completely defined by the angle θ the line BP forms with the zx plane. The angle θ is known as the *angular coordinate* of the body and is defined as positive when viewed as counterclockwise from A' . The angular coordinate will be expressed in radians (rad) or, occasionally, in degrees ($^\circ$) or revolutions (rev). We recall that

$$1 \text{ rev} = 2\pi \text{ rad} = 360^\circ$$

We recall from Sec. 11.9 that the velocity $\mathbf{v} = d\mathbf{r}/dt$ of a particle P is a vector tangent to the path of P and of magnitude $v = ds/dt$. Observing that the length Δs of the arc described by P when the body rotates through $\Delta\theta$ is

$$\Delta s = (BP) \Delta\theta = (r \sin \phi) \Delta\theta$$

and dividing both members by Δt , we obtain at the limit, as Δt approaches zero,

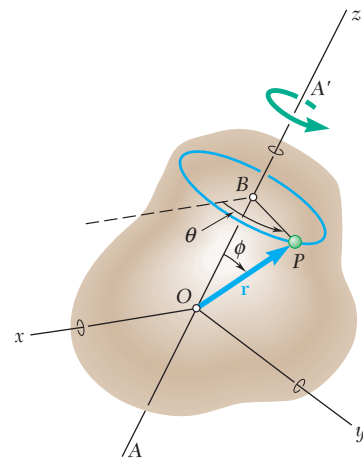


Fig. 15.8



CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
 LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
 CALL OR WHATSAPP:689 45 44 70

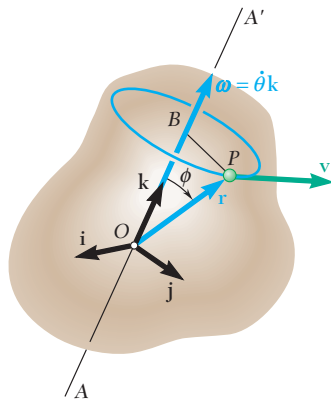


Fig. 15.9

magnitude v defined by (15.4). But this is precisely the result we would obtain if we drew along AA' a vector $\boldsymbol{\omega} = \dot{\theta}\mathbf{k}$ and formed the vector product $\boldsymbol{\omega} \times \mathbf{r}$ (Fig. 15.9). We thus write

$$\mathbf{v} = \frac{d\mathbf{r}}{dt} = \boldsymbol{\omega} \times \mathbf{r} \tag{15.5}$$

The vector

$$\boldsymbol{\omega} = \omega\mathbf{k} = \dot{\theta}\mathbf{k} \tag{15.6}$$

which is directed along the axis of rotation, is called the *angular velocity* of the body and is equal in magnitude to the rate of change $\dot{\theta}$ of the angular coordinate; its sense may be obtained by the right-hand rule (Sec. 3.6) from the sense of rotation of the body.†

The acceleration \mathbf{a} of the particle P will now be determined. Differentiating (15.5) and recalling the rule for the differentiation of a vector product (Sec. 11.10), we write

$$\begin{aligned} \mathbf{a} &= \frac{d\mathbf{v}}{dt} = \frac{d}{dt}(\boldsymbol{\omega} \times \mathbf{r}) \\ &= \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{r} + \boldsymbol{\omega} \times \frac{d\mathbf{r}}{dt} \\ &= \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{r} + \boldsymbol{\omega} \times \mathbf{v} \end{aligned} \tag{15.7}$$

The vector $d\boldsymbol{\omega}/dt$ is denoted by $\boldsymbol{\alpha}$ and is called the *angular acceleration* of the body. Substituting also for \mathbf{v} from (15.5), we have

$$\mathbf{a} = \boldsymbol{\alpha} \times \mathbf{r} + \boldsymbol{\omega} \times (\boldsymbol{\omega} \times \mathbf{r}) \tag{15.8}$$

Differentiating (15.6) and recalling that \mathbf{k} is constant in magnitude and direction, we have

$$\boldsymbol{\alpha} = \alpha\mathbf{k} = \dot{\omega}\mathbf{k} = \ddot{\theta}\mathbf{k} \tag{15.9}$$

Thus, the angular acceleration of a body rotating about a fixed axis is a vector directed along the axis of rotation, and is equal in magnitude to the rate of change $\dot{\omega}$ of the angular velocity. Returning to (15.8), we note that the acceleration of P is the sum of two vectors. The first vector is equal to the vector product $\boldsymbol{\alpha} \times \mathbf{r}$; it is tangent to the circle described by P and therefore represents the tangential component of the acceleration. The second vector is equal to the *vector triple product* $\boldsymbol{\omega} \times (\boldsymbol{\omega} \times \mathbf{r})$ obtained by forming the vector product of $\boldsymbol{\omega}$ and $\boldsymbol{\omega} \times \mathbf{r}$; since $\boldsymbol{\omega} \times \mathbf{r}$ is tangent to the circle described by P , the vector triple product is directed toward the center B of



CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
 LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
 CALL OR WHATSAPP:689 45 44 70

Rotation of a Representative Slab. The rotation of a rigid body about a fixed axis can be defined by the motion of a representative slab in a reference plane perpendicular to the axis of rotation. Let us choose the xy plane as the reference plane and assume that it coincides with the plane of the figure, with the z axis pointing out of the paper (Fig. 15.10). Recalling from (15.6) that $\boldsymbol{\omega} = \omega\mathbf{k}$, we




Fig. 15.10

note that a positive value of the scalar ω corresponds to a counter-clockwise rotation of the representative slab, and a negative value to a clockwise rotation. Substituting $\boldsymbol{\omega} = \omega\mathbf{k}$ for $\boldsymbol{\omega}$ into Eq. (15.5), we express the velocity of any given point P of the slab as

$$\mathbf{v} = \omega\mathbf{k} \times \mathbf{r} \tag{15.10}$$

Since the vectors \mathbf{k} and \mathbf{r} are mutually perpendicular, the magnitude of the velocity \mathbf{v} is


$$v = r\omega \tag{15.10'}$$

and its direction can be obtained by rotating \mathbf{r} through 90° in the sense of rotation of the slab.

Substituting $\boldsymbol{\omega} = \omega\mathbf{k}$ and $\boldsymbol{\alpha} = \alpha\mathbf{k}$ into Eq. (15.8), and observing that cross-multiplying \mathbf{r} twice by \mathbf{k} results in a 180° rotation of the vector \mathbf{r} , we express the acceleration of point P as

$$\mathbf{a} = \alpha\mathbf{k} \times \mathbf{r} - \omega^2\mathbf{r} \tag{15.11}$$

Resolving \mathbf{a} into tangential and normal components (Fig. 15.11), we write

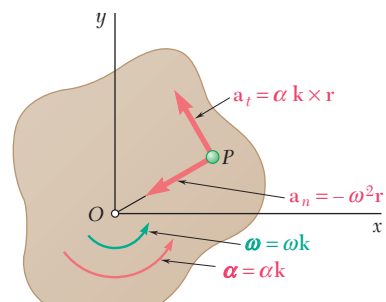

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
 LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
 CALL OR WHATSAPP:689 45 44 70





Photo 15.3 If the lower roll has a constant angular velocity, the speed of the paper being wound onto it increases as the radius of the roll increases.

15.4 EQUATIONS DEFINING THE ROTATION OF A RIGID BODY ABOUT A FIXED AXIS

The motion of a rigid body rotating about a fixed axis AA' is said to be *known* when its angular coordinate θ can be expressed as a known function of t . In practice, however, the rotation of a rigid body is seldom defined by a relation between θ and t . More often, the conditions of motion will be specified by the type of angular acceleration that the body possesses. For example, α may be given as a function of t , as a function of θ , or as a function of ω . Recalling the relations (15.6) and (15.9), we write

$$\omega = \frac{d\theta}{dt} \quad (15.12)$$

$$\alpha = \frac{d\omega}{dt} = \frac{d^2\theta}{dt^2} \quad (15.13)$$

or, solving (15.12) for dt and substituting into (15.13),

$$\alpha = \omega \frac{d\omega}{d\theta} \quad (15.14)$$

Since these equations are similar to those obtained in Chap. 11 for the rectilinear motion of a particle, their integration can be performed by following the procedure outlined in Sec. 11.3.

Two particular cases of rotation are frequently encountered:

1. *Uniform Rotation.* This case is characterized by the fact that the angular acceleration is zero. The angular velocity is thus constant, and the angular coordinate is given by the formula

$$\theta = \theta_0 + \omega t \quad (15.15)$$

2. *Uniformly Accelerated Rotation.* In this case, the angular acceleration is constant. The following formulas relating angular velocity, angular coordinate, and time can then be derived in a manner similar to that described in Sec. 11.5. The similarity between the formulas derived here and those obtained for the rectilinear uniformly accelerated motion of a particle is apparent.

$$\omega = \omega_0 + \alpha t$$

$$\theta = \theta_0 + \omega_0 t + \frac{1}{2}\alpha t^2 \quad (15.16)$$

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70


ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70

Cartagena99

15.5 GENERAL PLANE MOTION

As indicated in Sec. 15.1, we understand by general plane motion a plane motion which is neither a translation nor a rotation. As you will presently see, however, *a general plane motion can always be considered as the sum of a translation and a rotation.*

Consider, for example, a wheel rolling on a straight track (Fig. 15.12). Over a certain interval of time, two given points A and B will have moved, respectively, from A_1 to A_2 and from B_1 to B_2 . The same result could be obtained through a translation which would bring A and B into A_2 and B'_1 (the line AB remaining vertical), followed by a rotation about A bringing B into B_2 . Although the original rolling motion differs from the combination of translation and rotation when these motions are taken in succession, the original motion can be exactly duplicated by a combination of simultaneous translation and rotation.



CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70

Cartagena99

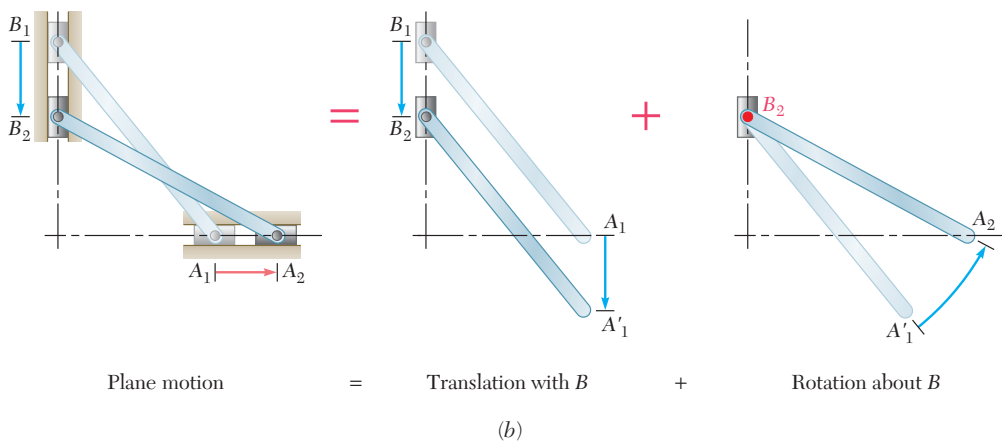
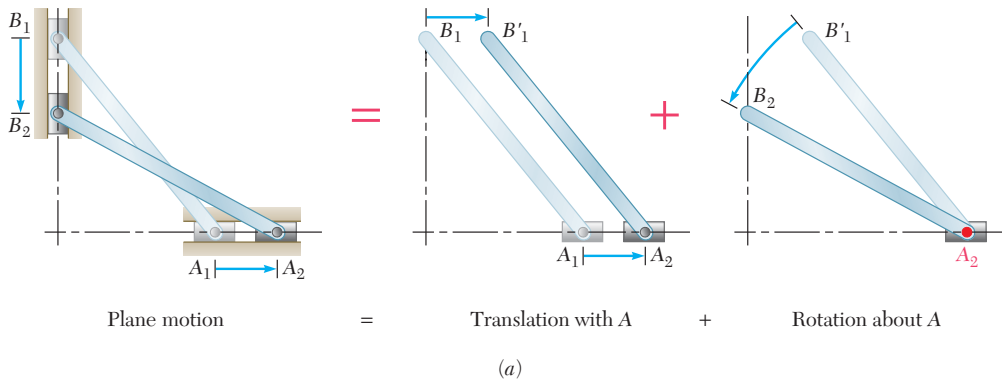


Fig. 15.13

Another example of plane motion is given in Fig. 15.13, which represents a rod whose extremities slide along a horizontal and a vertical track, respectively. This motion can be replaced by a translation in a horizontal direction and a rotation about A (Fig. 15.13a) or by a translation in a vertical direction and a rotation about B (Fig. 15.13b).

In the general case of plane motion, we will consider a small displacement which brings two particles A and B of a representative slab, respectively, from A_1 and B_1 into A_2 and B_2 (Fig. 15.14). This displacement can be divided into two parts: in one, the particles move into A_2 and B'_1 while the line AB maintains the same direction; in the other, B moves into B_2 while A remains fixed. The first part of the motion is clearly a translation and the second part a rotation about A.




Fig. 15.14

Recalling from Sec. 11.12 the definition of the relative motion of a particle with respect to a moving frame of reference—as opposed



CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70



Photo 15.4 Planetary gear systems are used to high reduction ratios with minimum space and weight. The small gears undergo general plane motion.

15.6 ABSOLUTE AND RELATIVE VELOCITY IN PLANE MOTION

We saw in the preceding section that any plane motion of a slab can be replaced by a translation defined by the motion of an arbitrary reference point A and a simultaneous rotation about A . The absolute velocity \mathbf{v}_B of a particle B of the slab is obtained from the relative-velocity formula derived in Sec. 11.12,

$$\mathbf{v}_B = \mathbf{v}_A + \mathbf{v}_{B/A} \tag{15.17}$$

where the right-hand member represents a vector sum. The velocity \mathbf{v}_A corresponds to the translation of the slab with A , while the relative velocity $\mathbf{v}_{B/A}$ is associated with the rotation of the slab about A and is measured with respect to axes centered at A and of fixed orientation (Fig. 15.15). Denoting by $\mathbf{r}_{B/A}$ the position vector of B relative to A , and by $\omega\mathbf{k}$ the angular velocity of the slab with respect to axes of fixed orientation, we have from (15.10) and (15.10')

$$\mathbf{v}_{B/A} = \omega\mathbf{k} \times \mathbf{r}_{B/A} \quad v_{B/A} = r\omega \tag{15.18}$$

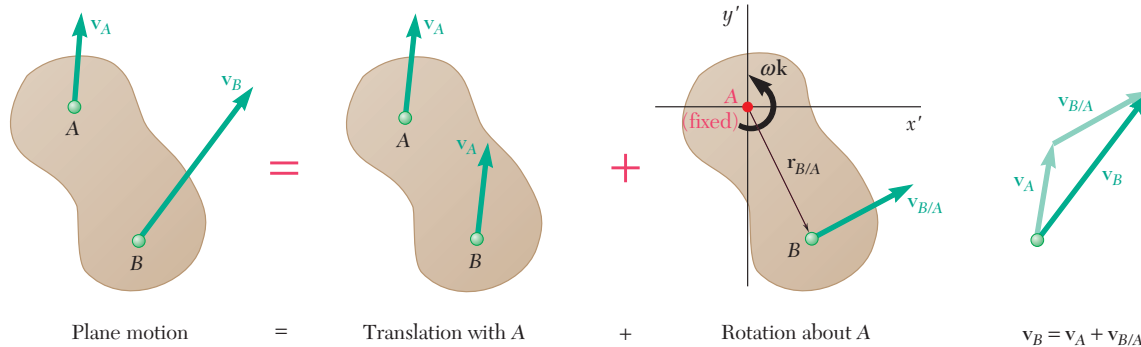


Fig. 15.15

where r is the distance from A to B . Substituting for $\mathbf{v}_{B/A}$ from (15.18) into (15.17), we can also write

$$\mathbf{v}_B = \mathbf{v}_A + \omega\mathbf{k} \times \mathbf{r}_{B/A} \tag{15.17'}$$

As an example, let us again consider the rod AB of Fig. 15.13. Assuming that the velocity \mathbf{v}_A of end A is known, we propose to find the velocity \mathbf{v}_B of end B and the angular velocity ω of the rod, in terms of the velocity \mathbf{v}_A , the length l , and the angle θ . Choosing A as a reference point, we express that the given motion is equivalent to a translation with A and a simultaneous rotation about A (Fig. 15.16). The absolute velocity of B must therefore be equal to the vector sum

$$\mathbf{v}_B = \mathbf{v}_A + \mathbf{v}_{B/A} \tag{15.17}$$

We note that while the direction of \mathbf{v}_A is known, its magnitude is not.

**CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70**

**ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70**



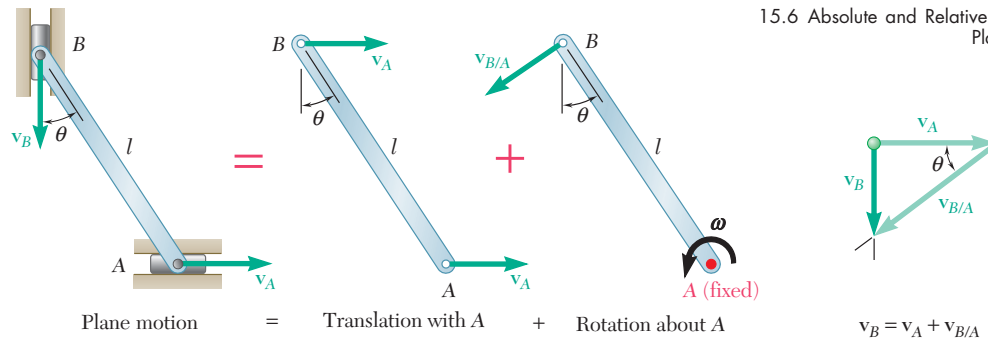


Fig. 15.16

The same result can be obtained by using B as a point of reference. Resolving the given motion into a translation with B and a simultaneous rotation about B (Fig. 15.17), we write the equation

$$v_A = v_B + v_{A/B} \quad (15.20)$$

which is represented graphically in Fig. 15.17. We note that $v_{A/B}$ and $v_{B/A}$ have the same magnitude $l\omega$ but opposite sense. The sense of the relative velocity depends, therefore, upon the point of reference which has been selected and should be carefully ascertained from the appropriate diagram (Fig. 15.16 or 15.17).

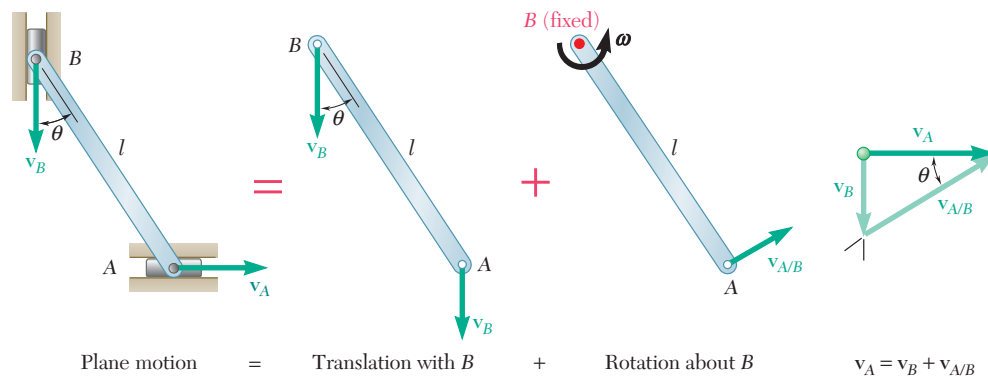


Fig. 15.17

Finally, we observe that the angular velocity ω of the rod in its rotation about B is the same as in its rotation about A . It is measured in both cases by the rate of change of the angle θ . This result is quite general; we should therefore bear in mind that *the angular velocity ω of a rigid body in plane motion is independent of the reference point.*

Most mechanisms consist not of one but of *several* moving parts. When the various parts of a mechanism are pin-connected, the analysis of the mechanism can be carried out by considering each part as a rigid body, keeping in mind that the points where two parts

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70



15.7 INSTANTANEOUS CENTER OF ROTATION IN PLANE MOTION



Consider the general plane motion of a slab. We propose to show that at any given instant the velocities of the various particles of the slab are the same as if the slab were rotating about a certain axis perpendicular to the plane of the slab, called the *instantaneous axis of rotation*. This axis intersects the plane of the slab at a point *C*, called the *instantaneous center of rotation* of the slab.

We first recall that the plane motion of a slab can always be

**CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70**

**ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70**

Cartagena99


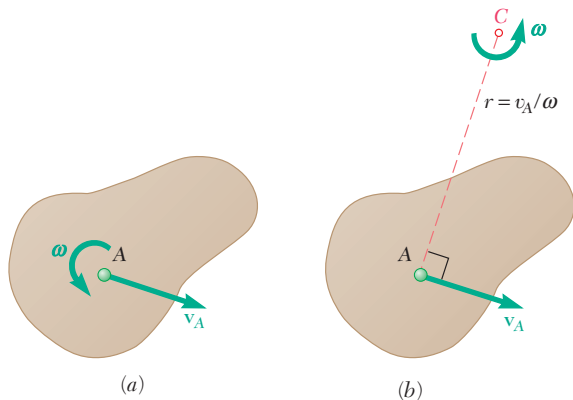


Fig. 15.18

completely the velocities of all the other particles of the slab (Fig. 15.18*a*). Now let us assume that \mathbf{v}_A and $\boldsymbol{\omega}$ are known and that they are both different from zero. (If $\mathbf{v}_A = 0$, point A is itself the instantaneous center of rotation, and if $\boldsymbol{\omega} = 0$, all the particles have the same velocity \mathbf{v}_A .) These velocities could be obtained by letting the slab rotate with the angular velocity $\boldsymbol{\omega}$ about a point C located on the perpendicular to \mathbf{v}_A at a distance $r = v_A/\omega$ from A as shown in Fig. 15.18*b*. We check that the velocity of A would be perpendicular to AC and that its magnitude would be $r\omega = (v_A/\omega)\omega = v_A$. Thus the velocities of all the other particles of the slab would be the same as originally defined. Therefore, *as far as the velocities are concerned, the slab seems to rotate about the instantaneous center C at the instant considered.*

The position of the instantaneous center can be defined in two other ways. If the directions of the velocities of two particles A and B of the slab are known and if they are different, the instantaneous center C is obtained by drawing the perpendicular to \mathbf{v}_A through A and the perpendicular to \mathbf{v}_B through B and determining the point in which these two lines intersect (Fig. 15.19*a*). If the velocities \mathbf{v}_A and \mathbf{v}_B of two particles A and B are perpendicular to the line AB and if their magnitudes are known, the instantaneous center can be found by intersecting the line AB with the line joining the extremities of the vectors \mathbf{v}_A and \mathbf{v}_B (Fig. 15.19*b*). Note that if \mathbf{v}_A and \mathbf{v}_B were parallel

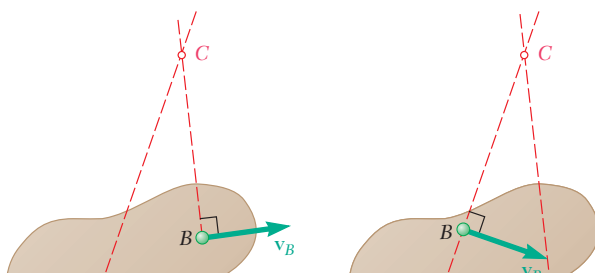

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70

Cartagena99

in Fig. 15.19a or if \mathbf{v}_A and \mathbf{v}_B had the same magnitude in Fig. 15.19b, the instantaneous center C would be at an infinite distance and ω would be zero; all points of the slab would have the same velocity.

To see how the concept of instantaneous center of rotation can be put to use, let us consider again the rod of Sec. 15.6. Drawing the perpendicular to \mathbf{v}_A through A and the perpendicular to \mathbf{v}_B through B (Fig. 15.20), we obtain the instantaneous center C . At the




Fig. 15.20

instant considered, the velocities of all the particles of the rod are thus the same as if the rod rotated about C . Now, if the magnitude v_A of the velocity of A is known, the magnitude ω of the angular velocity of the rod can be obtained by writing

$$\omega = \frac{v_A}{AC} = \frac{v_A}{l \cos \theta}$$

The magnitude of the velocity of B can then be obtained by writing

$$v_B = (BC)\omega = l \sin \theta \frac{v_A}{l \cos \theta} = v_A \tan \theta$$

Note that only *absolute* velocities are involved in the computation.

The instantaneous center of a slab in plane motion can be located either on the slab or outside the slab. If it is located on the slab, the particle C coinciding with the instantaneous center at a given instant t must have zero velocity at that instant. However, it should be noted that the instantaneous center of rotation is valid only at a given instant. Thus, the particle C of the slab which coincides with the instantaneous center at time t will generally not coincide with the instantaneous center at time $t + \Delta t$; while its velocity is zero at time t , it will probably be different from zero at time $t + \Delta t$. This means that, in general, the particle C does not have zero acceleration and, therefore, that the accelerations of the various particles of the slab cannot be determined as if the slab were rotating about C .

As the motion of the slab proceeds, the instantaneous center moves in space. But it was just pointed out that the position of the



CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70

15.8 ABSOLUTE AND RELATIVE ACCELERATION IN PLANE MOTION

We saw in Sec. 15.5 that any plane motion can be replaced by a translation defined by the motion of an arbitrary reference point A and a simultaneous rotation about A . This property was used in Sec. 15.6 to determine the velocity of the various points of a moving slab. The same property will now be used to determine the acceleration of the points of the slab.

We first recall that the absolute acceleration \mathbf{a}_B of a particle of the slab can be obtained from the relative-acceleration formula derived in Sec. 11.12,

$$\mathbf{a}_B = \mathbf{a}_A + \mathbf{a}_{B/A} \tag{15.21}$$

where the right-hand member represents a vector sum. The acceleration \mathbf{a}_A corresponds to the translation of the slab with A , while the relative acceleration $\mathbf{a}_{B/A}$ is associated with the rotation of the slab about A and is measured with respect to axes centered at A and of fixed orientation. We recall from Sec. 15.3 that the relative acceleration $\mathbf{a}_{B/A}$ can be resolved into two components, a *tangential component* $(\mathbf{a}_{B/A})_t$ perpendicular to the line AB , and a *normal component* $(\mathbf{a}_{B/A})_n$ directed toward A (Fig. 15.22). Denoting by $\mathbf{r}_{B/A}$ the position vector of B relative to A and, respectively, by $\omega\mathbf{k}$ and $\alpha\mathbf{k}$ the angular velocity and angular acceleration of the slab with respect to axes of fixed orientation, we have


$$\begin{aligned} (\mathbf{a}_{B/A})_t &= \alpha\mathbf{k} \times \mathbf{r}_{B/A} & (a_{B/A})_t &= r\alpha \\ (\mathbf{a}_{B/A})_n &= -\omega^2\mathbf{r}_{B/A} & (a_{B/A})_n &= r\omega^2 \end{aligned} \tag{15.22}$$

where r is the distance from A to B . Substituting into (15.21) the expressions obtained for the tangential and normal components of $\mathbf{a}_{B/A}$, we can also write

$$\mathbf{a}_B = \mathbf{a}_A + \alpha\mathbf{k} \times \mathbf{r}_{B/A} - \omega^2\mathbf{r}_{B/A} \tag{15.21'}$$



Photo 15.6 The central gear rotates about a fixed axis and is pin-connected to three bars which are in general plane motion.

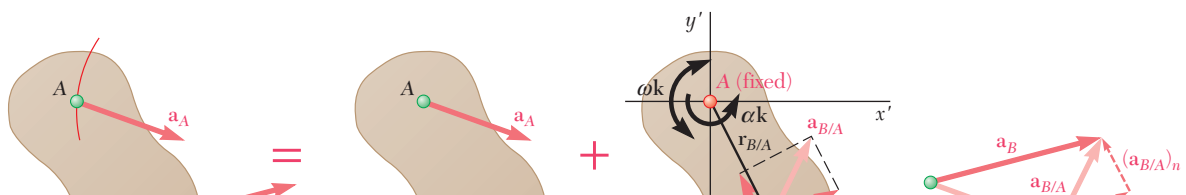

**CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70**

**ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70**



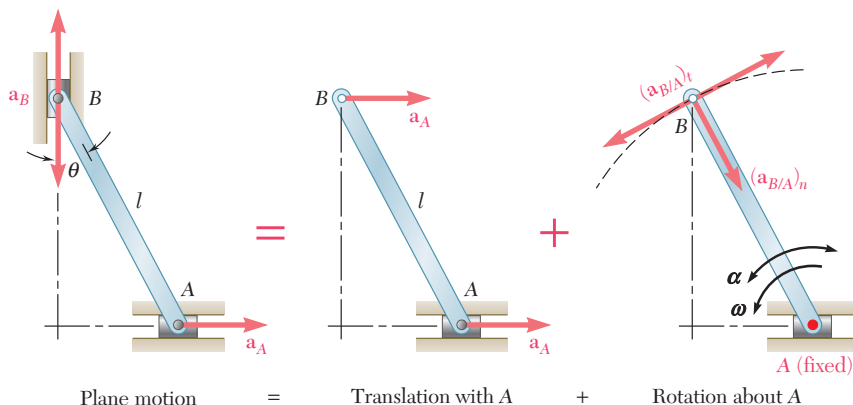


Fig. 15.23


As an example, let us again consider the rod AB whose extremities slide, respectively, along a horizontal and a vertical track (Fig. 15.23). Assuming that the velocity \mathbf{v}_A and the acceleration \mathbf{a}_A of A are known, we propose to determine the acceleration \mathbf{a}_B of B and the angular acceleration α of the rod. Choosing A as a reference point, we express that the given motion is equivalent to a translation with A and a rotation about A . The absolute acceleration of B must be equal to the sum

$$\begin{aligned} \mathbf{a}_B &= \mathbf{a}_A + \mathbf{a}_{B/A} \\ &= \mathbf{a}_A + (\mathbf{a}_{B/A})_n + (\mathbf{a}_{B/A})_t \end{aligned} \quad (15.23)$$

where $(\mathbf{a}_{B/A})_n$ has the magnitude $\omega^2 l$ and is directed toward A , while $(\mathbf{a}_{B/A})_t$ has the magnitude $l\alpha$ and is perpendicular to AB . Students should note that there is no way to tell whether the tangential component $(\mathbf{a}_{B/A})_t$ is directed to the left or to the right, and therefore both possible directions for this component are indicated in Fig. 15.23. Similarly, both possible senses for \mathbf{a}_B are indicated, since it is not known whether point B is accelerated upward or downward.

Equation (15.23) has been expressed geometrically in Fig. 15.24. Four different vector polygons can be obtained, depending upon the sense of \mathbf{a}_A and the relative magnitude of a_A and $(a_{B/A})_n$. If we are to determine a_B and α from one of these diagrams, we must know not only a_A and θ but also ω . The angular velocity of the rod should therefore be separately determined by one of the methods indicated in Secs. 15.6 and 15.7. The values of a_B and α can then be obtained by considering successively the x and y components of the vectors shown in Fig. 15.24. In the case of polygon a , for example, we write

$$\rightarrow x \text{ components:} \quad 0 = a_A + l\omega^2 \sin \theta - l\alpha \cos \theta$$

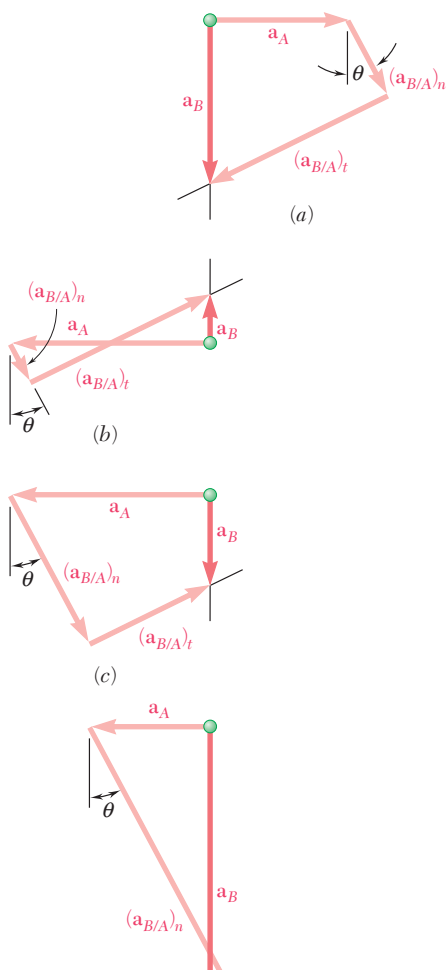

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
 LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
 CALL OR WHATSAPP:689 45 44 70

Cartagena99

in the example considered here, the extremities *A* and *B* of the rod were moving along straight tracks, and the diagrams drawn were relatively simple. If *A* and *B* had moved along curved tracks, it would have been necessary to resolve the accelerations \mathbf{a}_A and \mathbf{a}_B into normal and tangential components and the solution of the problem would have involved six different vectors.

When a mechanism consists of several moving parts which are pin-connected, the analysis of the mechanism can be carried out by considering each part as a rigid body, keeping in mind that the points at which two parts are connected must have the same absolute acceleration (see Sample Prob. 15.7). In the case of meshed gears, the tangential components of the accelerations of the teeth in contact are equal, but their normal components are different.

*15.9 ANALYSIS OF PLANE MOTION IN TERMS OF A PARAMETER

In the case of certain mechanisms, it is possible to express the coordinates *x* and *y* of all the significant points of the mechanism by means of simple analytic expressions containing a single parameter. It is sometimes advantageous in such a case to determine the absolute velocity and the absolute acceleration of the various points of the mechanism directly, since the components of the velocity and of the acceleration of a given point can be obtained by differentiating the coordinates *x* and *y* of that point.

Let us consider again the rod *AB* whose extremities slide, respectively, in a horizontal and a vertical track (Fig. 15.25). The coordinates x_A and y_B of the extremities of the rod can be expressed in terms of the angle θ the rod forms with the vertical:

$$x_A = l \sin \theta \quad y_B = l \cos \theta \quad (15.24)$$

Differentiating Eqs. (15.24) twice with respect to *t*, we write

$$v_A = \dot{x}_A = l\dot{\theta} \cos \theta$$

$$a_A = \ddot{x}_A = -l\dot{\theta}^2 \sin \theta + l\ddot{\theta} \cos \theta$$

$$v_B = \dot{y}_B = -l\dot{\theta} \sin \theta$$

$$a_B = \ddot{y}_B = -l\dot{\theta}^2 \cos \theta - l\ddot{\theta} \sin \theta$$

Recalling that $\dot{\theta} = \omega$ and $\ddot{\theta} = \alpha$, we obtain

$$v_A = l\omega \cos \theta \quad v_B = -l\omega \sin \theta \quad (15.25)$$

$$a_A = -l\omega^2 \sin \theta + l\alpha \cos \theta \quad a_B = -l\omega^2 \cos \theta - l\alpha \sin \theta \quad (15.26)$$




Fig. 15.25



CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70