

---

# Data Structures

---

Bachelor's Degree in Electrical and  
Mechanical Engineering  
Carlos III University of Madrid

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP: 689 45 44 70

# Types of Data Structures

1. **List** is an ordered and modifiable collection. Allows duplicate elements
2. **Tuple** is an ordered and immutable collection. Allows duplicate elements
3. **Set** is a messy collection and not indexed. There are no duplicate elements.
4. **String** is a collection of ordered and modifiable characters


## URLs:

- ◆ [https://www.w3schools.com/python/python\\_lists.asp](https://www.w3schools.com/python/python_lists.asp)
- ◆ <https://docs.python.org/3.6/tutorial/introduction.html>

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP: 689 45 44 70

# List (I)

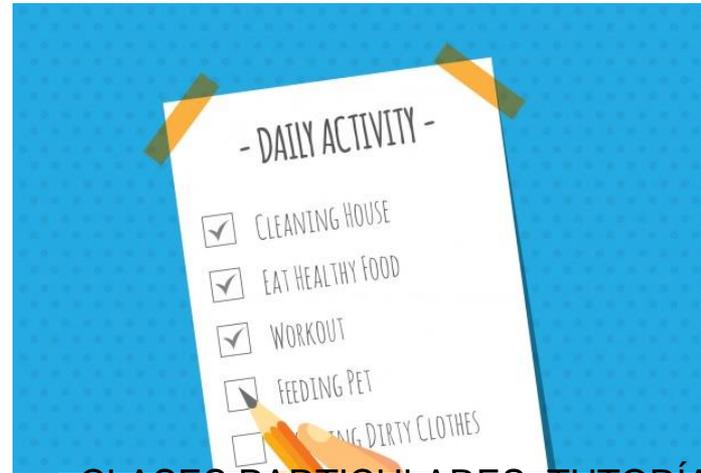

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP: 689 45 44 70

## List (II)

- ◆ The list of special variables that store several elements
- ◆ It can be written as a list of values separated by commas (items) in brackets
- ◆ It is not necessary that the items in a list all have the same type even if it is generally preferable that they are of the same type.
- ◆ The first element of the list is in position 0

Cartagena99

Print output (drag lower right corner to resize)  
[1, 4, 9, 16, 25]  
CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

squares 0 1 4 9 16 25

# List (III)

```
cars = ["Ford", "Volvo", "BMW"]
```

V

S

```
car1 = "Ford";
```

```
car2 = "Volvo";
```

CLASES PARTICULARES, TUTORIAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

Cartagena99

# List (IV)

Get the value of the first element in the list:

```
x = cars [0] # the first item in the list is in position 0
```

Modify the first item in the list:

```
cars [0] = "Toyota"
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP: 689 45 44 70

# List (V)

```
thislist = ["apple", "banana", "cherry"]  
print(thislist)
```

```
thislist = ["apple", "banana", "cherry"]  
thislist[1] = "blackcurrant"  
print(thislist)
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# List and Loop

Print the elements in the list "cars":

```
for x in cars:  
    print(x)
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Methods (I)

Method	Description
<a href="#"><code>append(element)</code></a>	Adds an element to the <b>end</b> of the list
<a href="#"><code>clear()</code></a>	Deletes all elements of the list
<a href="#"><code>copy()</code></a>	Returns a copy of the list
<a href="#"><code>count(item)</code></a>	Returns the number of elements with the specified value (item)
<a href="#"><code>extend(list)</code></a>	Adds the elements of another list to the end of the current list
<a href="#"><code>index(item)</code></a>	Returns the index of the first element with the specified value (item)
<a href="#"><code>insert(pos, item)</code></a>	Adds an element (item) at the specified position (pos)
<a href="#"><code>pop([pos])</code></a>	Retrieves and deletes an element from the list at the

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP: 689 45 44 70

[`sort\(\)`](#)

[`Order the list`](#)

## Methods (II)

- ◆ `fruits = ['apple', 'banana', 'cherry', 'orange']`  
`fruits.append("orange")`
- ◆ `fruits = ['apple', 'banana', 'cherry', 'orange']`  
`fruits.clear()`
- ◆ `fruits = ['apple', 'banana', 'cherry', 'orange']`  
`x = fruits.copy()`

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Methods (III)

- ◆ `fruits = ['apple', 'banana', 'cherry']`  
`cars = ['Ford', 'BMW', 'Volvo']`  
`fruits.extend(cars)`
- ◆ `fruits = ['apple', 'banana', 'cherry']`  
`x = fruits.index("cherry")`
- ◆ `fruits = ['apple', 'banana', 'cherry']`

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP: 689 45 44 70

# Methods (IV)

- ◆ `fruits = ['apple', 'banana', 'cherry']`  
`fruits.remove("banana")`
- ◆ `fruits = ['apple', 'banana', 'cherry']`  
`fruits.reverse()`
- ◆ `cars = ['Ford', 'BMW', 'Volvo']`  
`cars.sort()`

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Examples

Fill a list with a succession of squares of 10 elements


Print output (drag lower right corner to resize)

```
[0, 1, 4, 9, 16, 25, 36, 49, 64, 81]
```

```

1 squares = []
2
3 for x in range(10):
4     squares.append(x * x)
5
6 print(squares)
7

```

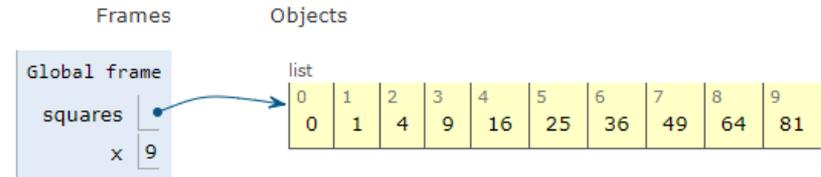

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
 LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
 ---  
 ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
 CALL OR WHATSAPP: 689 45 44 70

# Examples (more)

```
>>> fruits = ['orange', 'apple', 'pear', 'banana', 'kiwi', 'apple', 'banana']
>>> fruits.count('apple')
2
>>> fruits.count('tangerine')
0
>>> fruits.index('banana')
3
>>> fruits.index('banana', 4) # Find next banana starting a position 4
6
>>> fruits.reverse()
>>> fruits
['banana', 'apple', 'kiwi', 'banana', 'pear', 'apple', 'orange']
>>> fruits.append('grape')
>>> fruits
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

```
>>> fruits.pop()
```

# The lower in a list

```
vec = [2,3,5,9,1,-1,2,3]
```

```
low = vec[0] # need to start with some value
for i in vec:
    if i < low:
        low = i
print (low)
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Order a list

```
list=[23, 123,1, 5, 0]
for index in range(1,len(list)):
    value = list[index]
    i = index-1
    while i>=0:
        if value < list[i]:
            list[i+1] = list[i]
            list[i] = value
            i -= 1
        else:
            break
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Stack (LIFO)

- ◆ To use a list as a stack it is only allowed to use functions *append* and *pop*.

```

1 stack = [3, 4, 5]
2 stack.append(6)
3 stack.append(7)
4
5 print("Original Stack:", stack)
6
7 x = stack.pop()
8 print("Last element:", x)
9 print("Modified Stack:", stack)


```

Print output (drag lower right corner to resize)

```

Original Stack: [3, 4, 5, 6, 7]
Last element: 7
Modified Stack: [3, 4, 5, 6]
Last element: 6
Modified Stack: [3, 4, 5]

```

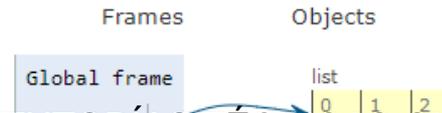

Cartagena99

CLASES PARTICULARES, TUTORIAS TÉCNICAS ONLINE  
 LLAMA O ENVIA WHATSAPP: 689 45 44 70  
 ---  
 ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
 CALL OR WHATSAPP: 689 45 44 70

# Queue (FIFO)

- ◆ The most efficiency way to create a queue is by using the class *deque* from the module *collections*.

```
from collections import deque  
myQueue = deque([3,4,5])
```


- ◆ The deque class contains the *append* and *popleft* functions to use the structure as a queue.

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70



# Tuple

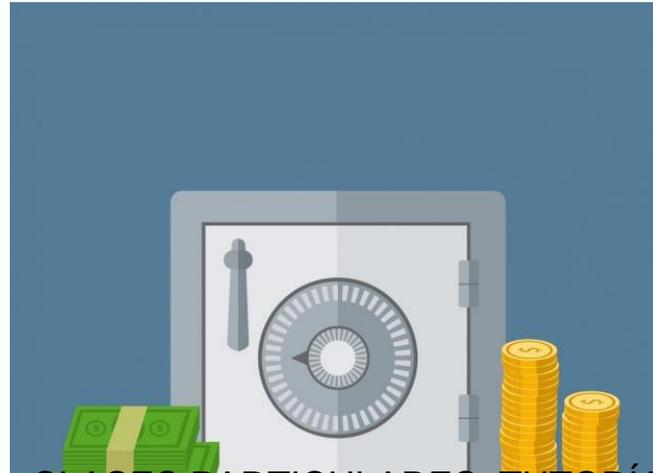

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Tuple

- ◆ A tuple is an immutable list. **It can not be modified in any case after its creation.**

```
thistuple = ("apple", "banana", "cherry")  
print(thistuple[1])  
print(len(thistuple))  
> banana  
> 3
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Set



Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Set

- ◆ A Set is a collection with no order and not indexed. There are no duplicate elements

```
thisset = {"apple", "banana", "cherry"}  
print(thisset)  
> {'apple', 'cherry', 'banana' }
```

```
thisset.add("damson")  
thisset.remove("banana")
```

**Cartagena99**

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# Set

- ◆ You can use 'remove' or 'discard' to remove elements from a set
  - If the element doesn't exist, remove will raise an error
  - If the element doesn't exist, discard will **not** raise an error

```
thisset = {"apple", "banana", "cherry"}  
print(thisset)  
> {'apple', 'cherry', 'banana' }
```

```
thisset.add("damson")  
thisset.remove("banana")
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# String



## Chain of characters

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# String (I)

- Chains are nothing more than text enclosed in single quotes ('string') or double quotes (“string”).
- Within the quotes you can add special characters by escaping them with '\', such as '\n', the new line character, or '\t', the tab character.

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# String (II)

- ◆ It is also possible to enclose a string between triple quotes (single or double). In this way we can write the text in several lines, and when printing the string, the line breaks that we introduced will be respected
- ◆ Chains also support operators such as addition (chain concatenation) and multiplication.

```
1 firstString = "One"
2 secondString = "Two"
3
4 thirdString = firstString + secondString
5 print(thirdString)
```

Print output (drag lower right corner to resize)

```
OneTwo
OneOneOne
```

Frames

Objects

Global frame

CLASES PARTICULARES, TUTORIAS TECNICAS ONLINE  
LLAMA O ENVIA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

Cartagena99

# String (III)

- ◆ Chains can be printed on the screen using the **print** function.
- ◆ A character is a string of length 1.

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# String (IV)

Get the character at position 1:

```
a = "hello"  
print(a[1])
```

Get the characters from position 2 to 5:

```
b = "world"  
print(b[2:5])
```

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP: 689 45 44 70

# String (V)

The `strip` method returns the string without leading and trailing spaces:

```
a = "    Hello, World!    "  
print(a.strip()) # returns "Hello, World!"
```

Function `len()` returns the length of the String.

Cartagena99

CLASES PARTICULARES, TUTORIAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

```
print(len(a))
```

# String (VI)

The **lower()** method returns the string in lowercase:

```
a = "Hello, World!"  
print(a.lower())  
> hello, world!
```

The **upper()** method returns the string in uppercase:

The logo for Cartagena99, featuring the text "Cartagena99" in a stylized font with a blue and orange gradient background.

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

# String (VII)

**replace()** replaces a string with another string:

```
a = "Hello, World!"  
print(a.replace("H", "J"))  
> Jello, World!
```

**split()** divides the string into substrings when and if it finds the separator:

Cartagena99

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70  
---  
ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70